
DATE
22 October 2026

SOLARFLOW SOLAR ENERGY

3.48 kWp On-Grid Rooftop Solar Project Proposal

Residential rooftop solar under PM Surya Ghar: Muft Bijli Yojana

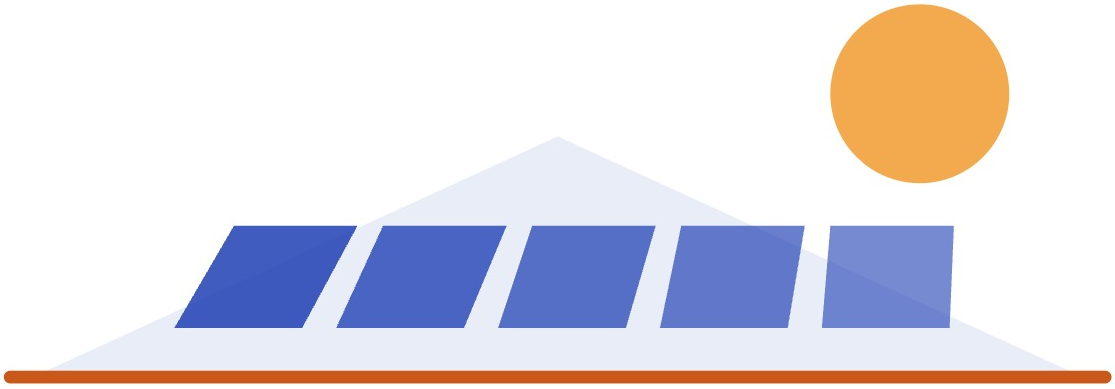

PREPARED FOR

Test Customer A
12 Test Society, Demo Town, Demo District, 000000
+91 0000000001

PROPOSAL DETAILS

Proposal no.	Quote-3255
System	3.48 kWp On-Grid
Date	22 October 2026
Valid till	6 November 2026
Prepared by	Test Agent · 0000000000

SOLARFLOW | GSTIN: DEMO-GST-001 | CIN: DEMO-CIN-001
100 Demo Avenue, Sample City (fictional)
hello@solarflow.example

Proposal Overview

Your customer and site details, and the system at a glance

ON-GRID SYSTEM

Rooftop Solar Power System

Grid-connected solar with net-metering

Turnkey installation

PM Surya Ghar subsidy

CUSTOMER & SITE

Customer	Test Customer A	**Email**	testcustomer@example.com
Phone	+91 0000000001	**Connection**	Residential
Address	12 Test Society, Demo Town, Demo District, 000000	**GEB / GEDA charges**	Including
City / town	Demo Town	**Prepared by**	Test Agent · 0000000000

AT A GLANCE

SYSTEM CAPACITY	PRICE (INCL. GST)	GOVT. SUBSIDY (EST.)	EFFECTIVE COST
3.48 kWp	₹1,89,000	₹78,000	₹1,11,000

ANNUAL GENERATION	SAVINGS IN YEAR 1	SAVINGS OVER 25 YEARS	PAYBACK
5,011 units	₹32,573	₹11,10,455	3.3 years

ABOUT SOLARFLOW

SolarFlow is a fictional solar energy company created for this demonstration. This sample proposal illustrates a residential solar installation workflow.

All customer, company, banking and registration details shown here are synthetic. This document is for demonstration only and is not a payable quotation.

WHAT YOU GET

- ✓ A system sized to your electricity use
- ✓ DISCOM net-metering application handled for you
- ✓ PM Surya Ghar subsidy application support
- ✓ Manufacturer warranties on modules and inverter
- ✓ 5-year workmanship warranty from SOLARFLOW

How Your System Works

Energy flow, net-metering and your installation journey

ENERGY FLOW, STEP BY STEP

1. **Generation**
   Solar panels convert sunlight into DC electricity throughout the day.
2. **DC Protection**
   The DCDB isolates and protects the DC side with fuses and surge protection.
3. **Conversion**
   The inverter converts DC into grid-synchronised 230 V AC power.
4. **AC Protection**
   The ACDB safeguards the AC side and provides safe isolation.
5. **Net-Metering**
   The bi-directional meter records energy imported and exported.
6. **Home & Grid**
   Your loads are powered first; surplus energy is exported to the grid.

What is net-metering?

Your DISCOM installs a bi-directional meter that records both the energy you draw from the grid and the surplus solar energy you export to it. Your bill is worked out on the *net* units (import minus export), and surplus units are credited at the DISCOM's export rate — so your rooftop keeps saving you money even when you are not at home.

COMPONENT TECHNOLOGY

Solar PV Modules
Mono PERC DCR modules, 580 Wp each, from SolarFlow Essential. 25-year performance warranty from the manufacturer.

Grid-Tie Inverter
MPPT-tracked conversion of DC to grid-synchronised AC, with anti-islanding protection and app-based monitoring. Make: DemoVolt.

Mounting Structure
Module Mounting Structure (GI), up to 8 ft from the roof, designed for the wind load at your site.

Protection & Earthing
Lightning arrester, surge protection in the DCDB and ACDB, and earthing for the array, arrester and system.

YOUR INSTALLATION JOURNEY

1. **Site Survey & System Design**
   Roof assessment, shadow check and a system design suited to your consumption.
2. **Order Confirmation & Procurement**
   The advance payment confirms the order; materials are then procured.
3. **Structure & Module Installation**
   Mounting structure erection and panel installation.
4. **Electrical & Safety Works**
   DC/AC wiring, distribution boxes, earthing and lightning protection.
5. **DISCOM Liaison & Net-Metering**
   We handle the net-meter application and coordination with your DISCOM.
6. **Testing, Commissioning & Handover**
   System testing, a walk-through of how to use it, and documents handed over.

Recommended System

Bill of materials and warranty coverage

System capacity	3.48 kWp	**Structure**	Module Mounting Structure (GI), up to 8 ft from the roof
Modules	6 × 580 Wp = 3.48 kWp DC	**Expected generation**	418 units / month
Inverter	On-grid, DemoVolt	**Connection**	Net-metered with your DISCOM

BILL OF MATERIALS

SN	Item description	Qty	Unit	Make
1	Solar PV Module (Mono PERC DCR) 580 Wp	6	Nos	SolarFlow Essential
2	On-Grid Inverter (3.5 kW class)	1	Nos	DemoVolt
3	Module Mounting Structure (GI), up to 8 ft from the roof	1	Set	As per site design
4	AC Distribution Box (ACDB)	1	Nos	Reputed make
5	DC Distribution Box (DCDB)	1	Nos	Reputed make
6	DC Cable (4 sq mm, UV protected)	50	Mtrs	Reputed make
Installation Accessories				
7	Lightning Arrester (LA) with 16 sq mm LA cable	1	Nos	Reputed make
8	Earthing Kit (Chemical/Rod)	3	Set	Reputed make
9	MC4 Connectors	4	Pairs	Reputed make
10	AC Cable (Service Wire)	20	Mtrs	Reputed make
11	Installation & Commissioning	1	Job	SOLARFLOW
12	Transportation & Handling	1	Trip	SOLARFLOW

Components are from reputed manufacturers. Actual brands may vary with availability; equivalent or better alternatives will be supplied.

WARRANTY COVERAGE

Solar PV modules	25 years performance warranty, 15 years product warranty (manufacturer)
Inverter	10 years standard warranty (manufacturer)
Mounting structure	10 years against structural defects
Workmanship	5 years installation warranty (SOLARFLOW)

All warranties are subject to proper use and maintenance as per manufacturer guidelines. Warranty certificates are handed over at commissioning.

Generation Estimate

What your 3.48 kWp system is expected to produce over 25 years

PER MONTH (YEAR 1)	PER YEAR (YEAR 1)	OVER 25 YEARS
418 units	5,011 units	1,18,044 units

Basis: 120 units per kW per month on average, module output reducing 0.5% a year, electricity tariff ₹6.50/unit rising 3.0% a year, export credit ₹2.25/unit rising at the same rate. Your usage: 418 units a month. Actual generation depends on weather, shading and upkeep.

Year	Generation (units)	Tariff ₹/unit	Bill without solar	Bill with solar	Savings	Cumulative savings
1	5,011	6.50	₹32,604	₹31	₹32,573	₹32,573
2	4,986	6.70	₹33,582	₹200	₹33,382	₹65,955
3	4,961	6.90	₹34,590	₹378	₹34,212	₹1,00,167
4	**4,936**	**7.10**	**₹35,627**	**₹565**	**₹35,062**	**₹1,35,229**
5	4,912	7.32	₹36,696	₹763	₹35,933	₹1,71,162
6	4,887	7.54	₹37,797	₹971	₹36,826	₹2,07,988
7	4,863	7.76	₹38,931	₹1,190	₹37,741	₹2,45,729
8	4,838	7.99	₹40,099	₹1,420	₹38,679	₹2,84,409
9	4,814	8.23	₹41,302	₹1,661	₹39,640	₹3,24,049
10	4,790	8.48	₹42,541	₹1,915	₹40,625	₹3,64,674
11	4,766	8.74	₹43,817	₹2,182	₹41,635	₹4,06,309
12	4,742	9.00	₹45,132	₹2,462	₹42,670	₹4,48,979
13	4,719	9.27	₹46,486	₹2,756	₹43,730	₹4,92,709
14	4,695	9.55	₹47,880	₹3,063	₹44,817	₹5,37,526
15	4,672	9.83	₹49,316	₹3,386	₹45,930	₹5,83,456
16	4,648	10.13	₹50,796	₹3,724	₹47,072	₹6,30,528
17	4,625	10.43	₹52,320	₹4,078	₹48,241	₹6,78,769
18	4,602	10.74	₹53,889	₹4,449	₹49,440	₹7,28,209
19	4,579	11.07	₹55,506	₹4,837	₹50,669	₹7,78,878
20	4,556	11.40	₹57,171	₹5,243	₹51,928	₹8,30,806
21	4,533	11.74	₹58,886	₹5,668	₹53,218	₹8,84,024
22	4,511	12.09	₹60,653	₹6,112	₹54,541	₹9,38,565
23	4,488	12.45	₹62,473	₹6,576	₹55,896	₹9,94,461
24	4,466	12.83	₹64,347	₹7,062	₹57,285	₹10,51,746
25	4,443	13.21	₹66,277	₹7,569	₹58,709	₹11,10,455

Highlighted: the year the cumulative savings pass the effective cost (₹1,11,000).

Savings & Returns

Your bill before and after solar, and the return on your investment

MONTHLY BILL COMPARISON (YEAR 1, AVERAGE)

WITHOUT SOLAR

₹2,717

per month · 418 units at ₹6.50

→

WITH SOLARFLOW SOLAR

₹3

per month, after net-metering

Save ₹2,714 / month

NET-METERING (YEAR 1)

Units generated	5,011 units
Units you use	5,016 units
Units still drawn from the grid	5 units
Surplus units exported	0 units
Net-metering credit	₹0 (at ₹2.25/unit)
Annual savings, year 1	₹32,573

SAVINGS OVER TIME

Year	Tariff (₹/unit)	Annual savings	Cumulative savings
Year 1	6.50	₹32,573	₹32,573
Year 5	7.32	₹35,933	₹1,71,162
Year 10	8.48	₹40,625	₹3,64,674
Year 15	9.83	₹45,930	₹5,83,456
Year 20	11.40	₹51,928	₹8,30,806
Year 25	13.21	₹58,709	₹11,10,455

SAVINGS OVER 25 YEARS	PAYBACK	RETURN ON INVESTMENT	INTERNAL RATE OF RETURN
₹11,10,455	**3.3 yrs** in year 4	**900%**	**31.8%**

Returns are worked out on the effective cost of ₹1,11,000 (price less the expected subsidy), before any loan.

ENVIRONMENTAL IMPACT (25 YEARS)

CO_2 AVOIDED	EQUAL TO PLANTING	CLEAN ENERGY
96.8 tonnes	**4,356+ trees**	**118.0 MWh**

Commercial Offer

Pricing and payment terms

FROM

SOLARFLOW
100 Demo Avenue, Sample City (fictional)
hello@solarflow.example
GSTIN: DEMO-GST-001

PROPOSAL FOR

Test Customer A
12 Test Society, Demo Town, Demo District, 000000
Proposal no. **Quote-3255** · 22 October 2026

PANEL OPTIONS

Panel brand	Base value	Discount	Net payable	Subsidy	After subsidy
SolarFlow Essential · priced in this proposal	**₹1,89,000**	**₹0**	**₹1,89,000**	**₹78,000**	**₹1,11,000**
SolarFlow Plus	₹1,97,000	₹0	₹1,97,000	₹78,000	₹1,19,000
SolarFlow Premium	₹2,05,000	₹0	₹2,05,000	₹78,000	₹1,27,000

SYSTEM PRICING (SOLARFLOW ESSENTIAL)

System capacity	3.48 kWp On-Grid
Taxable value	₹1,73,554
CGST (4.45%)	₹7,723
SGST (4.45%)	₹7,723
Total price (incl. GST)	**₹1,89,000**

Amount in words: One Lakh Eighty Nine Thousand Rupees Only. GST is included: 70% of the system value at 5% (HSN 8541) and 30% at 18% (HSN 9954). GEB / GEDA charges: Including.

TOTAL PRICE	PM SURYA GHAR SUBSIDY	EFFECTIVE COST TO YOU
₹1,89,000	**− ₹78,000**	**₹1,11,000**
incl. GST, paid to SOLARFLOW	credited to your bank account by the Government	after the subsidy is received

About the subsidy

The PM Surya Ghar subsidy is credited by the Government directly to your bank account — it is not a discount from SOLARFLOW. It depends on DISCOM approval of the installation and on the name on the electricity bill matching the name on the bank account.

PAYMENT SCHEDULE

1. **Advance payment (50%)** ₹94,500
   To confirm the order. Includes DISCOM registration charges of ₹2,000 per kW.

2. **Balance payment (50%)** ₹94,500
   Before dispatch of materials to site.

Bank transfer details

Beneficiary: SOLARFLOW DEMO ENERGY A/c no.: DEMO-ACCOUNT-0001 Bank: Demo Bank (not payable), DEMO TOWN
IFSC: DEMO-IFSC

Terms & Conditions

Scope, responsibilities and general terms

SCOPE OF WORK

- ✓ Supply of all solar PV components as per the Bill of Materials
- ✓ Complete installation & commissioning
- ✓ AC/DC wiring, earthing & lightning arrester
- ✓ Net-metering application & DISCOM liaison
- ✓ PM Surya Ghar subsidy application support
- ✓ System testing, handover & user guidance

EXCLUSIONS

- × Civil work, scaffolding or roof waterproofing
- × Electrical panel upgrades / main breaker
- × Government fees, permits or DISCOM charges
- × Internet / Wi-Fi for remote monitoring
- × Storage batteries (unless in the BOM)
- × Structural modifications to the building

CUSTOMER RESPONSIBILITIES

Site Access
Provide unobstructed access to the roof / installation site during working hours.

Electricity & Water
Provide electricity and water supply at site during installation.

Approvals
Obtain permission from the housing society or local authority, if applicable.

Maintenance
Clean the solar panels regularly for best output and warranty compliance.

GENERAL TERMS & CONDITIONS

Validity: This proposal is valid until 6 November 2026. Prices may change after that date due to market changes.

Payment: As per the payment schedule in this proposal.

Delivery: Material delivery within 10–15 working days from receipt of the advance payment.

Installation: Supply, erection and commissioning generally take about one month, subject to site readiness.

Rooftop area: About 10 sq m of shadow-free roof per kWp is to be provided by the customer.

Operation & maintenance: Free operation and maintenance for 5 years. Regular panel cleaning is done by the customer.

Warranty: Product warranties are from the respective manufacturers. SOLARFLOW will facilitate all claims.

Subsidy: The PM Surya Ghar subsidy is paid by the Government directly into the customer's bank account. It depends on DISCOM approval and on the name on the electricity bill matching the bank account name.

Extra work: Any extra or additional material or work is billed at actual cost.

Cancellation: If the order is cancelled after DISCOM registration, the advance is refunded after deducting the DISCOM registration charges, with a statement of account.

Force majeure: SOLARFLOW is not liable for delays due to natural calamities, strikes, government orders or supply disruptions.

Jurisdiction: Any disputes are subject to the courts at Sample City (fictional).

All GST is inclusive · 70% Solar Power System-(HSN CODE-8541)-5% @GST · 30% Solar Power System-(HSN CODE-9954)-18% @GST · Owner Name:-Demo Owner · National Portal Empanelment Number -DEMO-PORTAL-001 · Electrical Contractor Number -DEMO-CONTRACTOR-001

Proposal Acceptance

Confirm the proposal to go ahead

Proposal no.	Quote-3255
Customer	Test Customer A
System	3.48 kWp On-Grid rooftop solar
Panels	SolarFlow Essential
Total price (incl. GST)	₹1,89,000
Expected subsidy	₹78,000 (credited to the customer's bank account)
Effective cost	₹1,11,000
Payment method	Cash / bank transfer
Valid till	6 November 2026

I / We have read this proposal, including the Bill of Materials, the commercial offer, the payment schedule and the terms & conditions, and accept it. I / We understand that the PM Surya Ghar subsidy is paid by the Government, depends on DISCOM approval and requires the name on the electricity bill to match the bank account name.

CUSTOMER

Signature

Test Customer A
Date: _____

FOR SOLARFLOW

Stamp & sign

Test Agent
Date: 22 October 2026

Thank you for choosing SOLARFLOW

Questions about this proposal? Contact Test Agent · 0000000000.